



Radiantgreen
Light For Future

LED MICROWAVE SENSOR TUBE






LED MICROWAVE SENSOR TUBE

Specifications

Model	RG-MST818W	
Product Size	1198mm(L) x 26mm(W) x 30mm(H)	
Input Voltage	85V-265VAC	
Frequency	50/60Hz	
Power Consumption	18W	
Power Factor	≥ 0.93	
THD	≤ 15%	
LED Source	144pcs SMD/2835	
Delay Time	12~120 Second (Adjustable)	
Standby Mode	2W-10% Brightness (Adjustable)	
Inductive Distance	8 Meter (Adjustable)	
Luminous Efficiency (LM/W)	100-110lm/w	
Lux Cone	Lux @1M	378
	Lux @2M	96
	Lux @3M	43
CRI (RA)	≥ 75	
Beam Angel (Degree)	120°	
Color Temperature	4000K 4500K 5000K 6000K	
Lifespan (Hrs)	>50000	
Working Temperature	-20°C~+40°C	
Working Humidity	(20-90)%RH	
Storage Temperature	-20°C~+40°C	
Storage Humidity	(10-90)%RH	

RG-MST818W

Photometric Curve

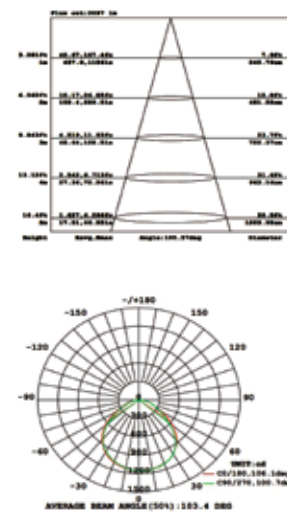

RADIANT TRADE SDN BHD (875563-M)
 Lot 1.19 & 1.20, 1st Floor Kompleks Desa, Jalan Kepong Batu 8,
 Kepong, 52100 Kuala Lumpur, Malaysia.

Tel: +603.6272.1629 Fax: +603.6272.0630 Email: info@radiantgreenled.com

www.radiantgreenled.com